




- ✓ Single passage in the set direction
- ✓ Bi-directional single passage
- ✓ Free passage in the set direction
- ✓ Always free or locked

TECHNICAL DATA

All the gates models are space efficient security barriers, with a compact design, yet offer sufficient space to integrate any access control system. They can be mounted with display, passage counter, card reader, token operation traffic lights, command console, alarm system against unauthorized entries, interfaced with a PC through a RS232(RS485,TCP-IP)line. The unique swing arm feature provides a fail-safe safety solution in case of an emergency or power failure, providing egress in case of crisis evacuations. Durability with minimal maintenance means years and millions of trouble free passages. The gate creates a secure environment in. for example, a reception area. Our gates are used in applications including stadiums and arenas, perimeter and interior security, recreation and amusement parks, retail crowd control, transit fare collection and lobby access contro

FEATURES

- ✓ Use IC cards, ID cards, Bar code or magnetic cards as automatic identification system and achieve access, attendance fees or function
- ✓ A direction indicator, showed that pedestrian access to the current status of, and guide pedestrians correct and smooth passage
- ✓ Display has been in use for statistics and numbers
- ✓ With voice and strobe light alerts
- ✓ A combination of infrared sensors and police ant illegal entry into pedestrian access, the protection of pedestrians smooth and the prevention of the channel following
- ✓ Double anti-clipping function, photocell antic lipping and mechanical anti-clipping

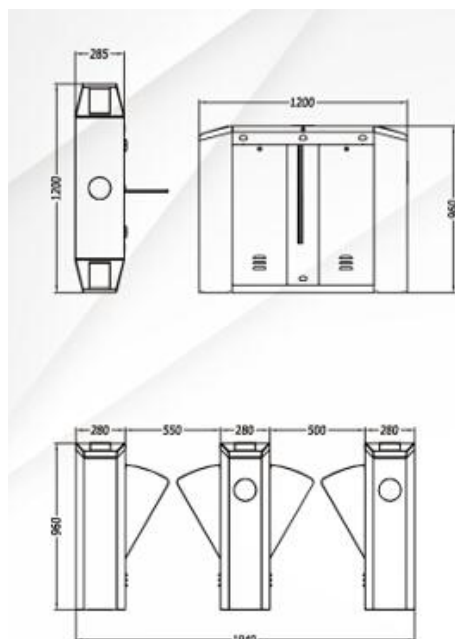

Technical Data

Passage width	mm	≤550
Throughput rate	p/m	35
Power supply	V/(ac)	100-240
Operational voltage	V/(dc)	24
Max power consumption	w	35
Frequency	hz	50-60
Prectection level	IP	>44
Working temperature	degree	-25 to +70
Dimension excluding bars	mm	1200*280*960
Net weight including bars	Kg	80

TURNO500L : Left Flap Turnstile
TURNO500R : Right Flap Turnstile
TURNO500M : Middle Flap Turnstile

- scheda di controllo o telecomando incorporata di serie
- modelli per applicazione interna ed esterna (sotto copertura)
- modelli con bracci barriera antipanico
- alta velocità di trasmissione
- controllo del passaggio bidirezionale
- Indicatori direzionali a LED / indicatori di stato
- tensione di alimentazione di sicurezza 12 - 36V
- controllo di override della chiave per situazioni di emergenza
- meccanismo di rotazione privo di inerzia e scorrevolezza



- built-in control board or remote control unit supplied as standard
- models for indoor and outdoor application (under shelter)
- models with anti-panic barrier arms
- high throughput rate
- bi-directional passage control
- LED directional indication / status lights
- safe supply voltage 12 - 36V
- key override control for emergency situations
- inertia-free and smooth rotation mechanism



- un tableau de commande intégré ou une télécommande fournie en standard
- modèles pour application intérieure et extérieure (sous abri)
- modèles avec bras anti-panique
- débit élevé
- contrôle de passage bidirectionnel
- LED d'indication de direction / voyants d'état
- tension d'alimentation sécurisée 12 - 36V
- commande de neutralisation des clés pour les situations d'urgence
- mécanisme de rotation sans inertie et lisse



- tarjeta de control incorporada o unidad de control remoto suministrada de serie
- Modelos para aplicación interior y exterior (bajo techo).
- Modelos con brazos de barrera antipánico.
- alta tasa de rendimiento
- control de pasaje bidireccional
- Indicadores LED direccionales / luces de estado
- tensión de alimentación segura 12 - 36V
- Control de anulación de teclas para situaciones de emergencia.
- Mecanismo de rotación suave y sin inercia.